



DESCRIPTION

CC - Series is a new technology, tinting additive, that helps achieve a good color match for new OEM colors when added to one of the existing General **2K** clearcoats.

- Available in 2 units per box.
- Each unit consists of 100 ml.
- Including flexible closures.




CC- CLEARCOAT ADDITIVE




Suitable Substrates:


- “General” Genrock Basecoat.
- “General” Gen₂o Basecoat.

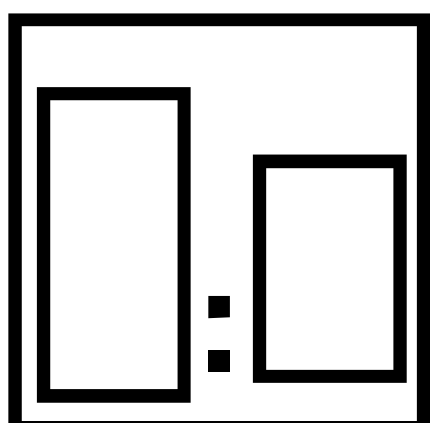


Tint ready to spray General 2K clearcoat as per color recipe found in GenMix.

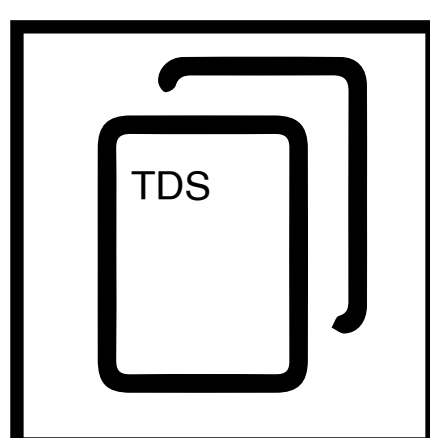


Follow the TDS of the appropriate 2K clearcoat for all technical instructions.

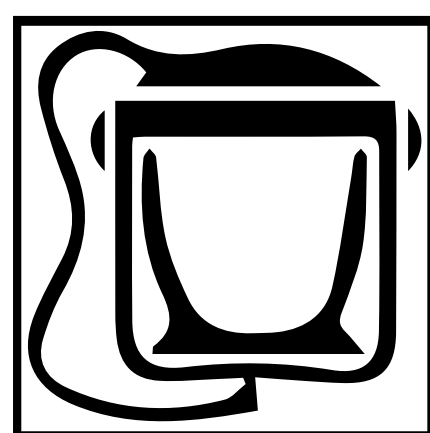

Protective gear is advised.

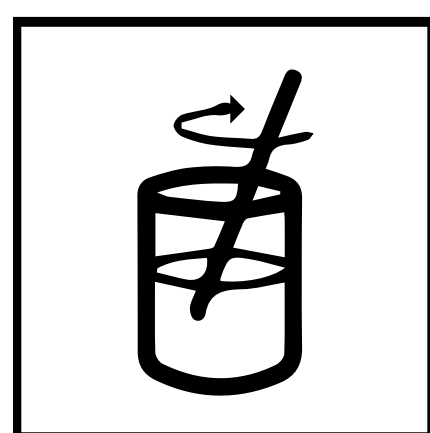

Stir the product well

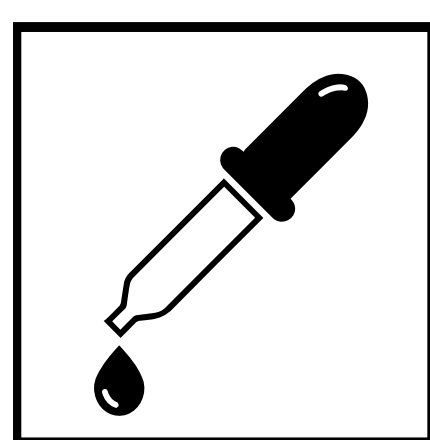

Use the pipette




Clean the pipette with cleaning thinner after each use

CC- CLEARCOAT ADDITIVE




Step by Step : Color Verification


Apply a let-down panel to define the number of coats needed to achieve the color match:

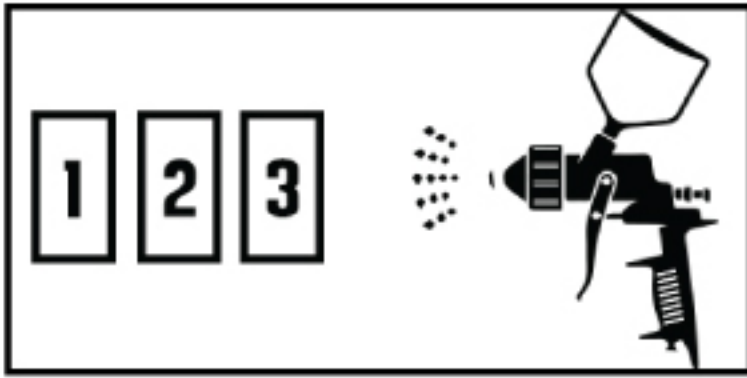


1. Apply the correct colored primer, as given by Genmix, to 3 test panels and flash-off or dry properly.

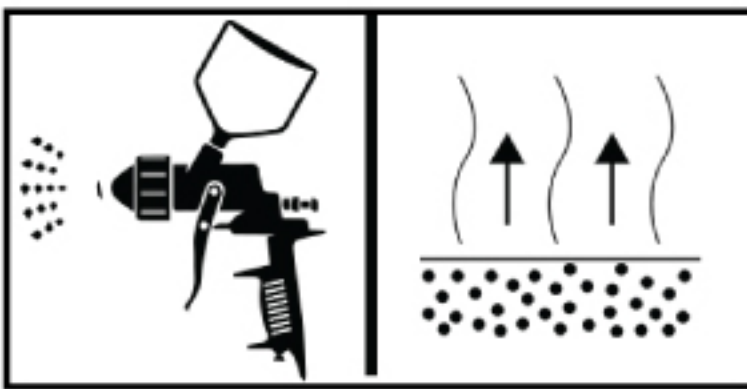


2. Apply the basecoat layer and flash-off.

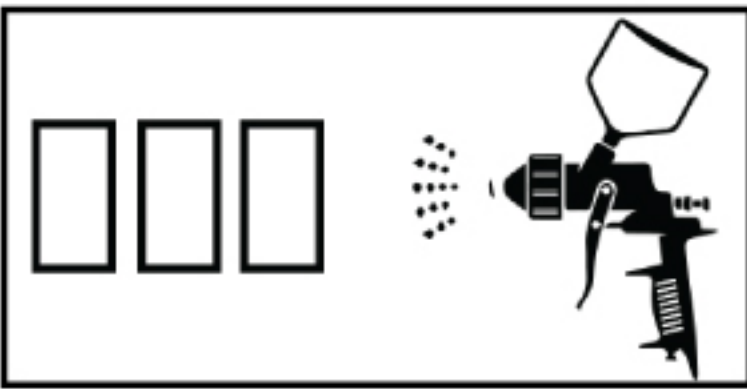


3. Apply 1st medium coat of tinted 2K clear to all 3 panels.

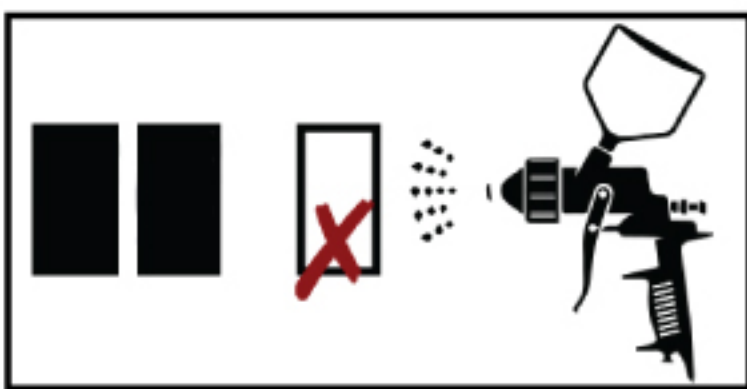


4. Take away one of them. Mark 1 coat on the back and then apply a 2nd coat to the other 2.

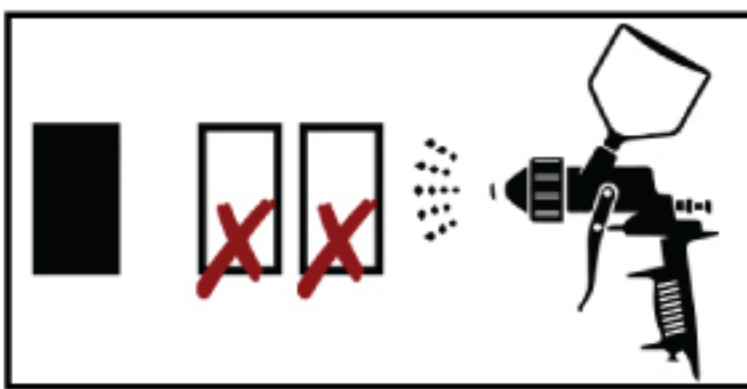

5. Take away another panel. Mark 2 coats on the back and then apply a 3rd coat to the 3rd, last.

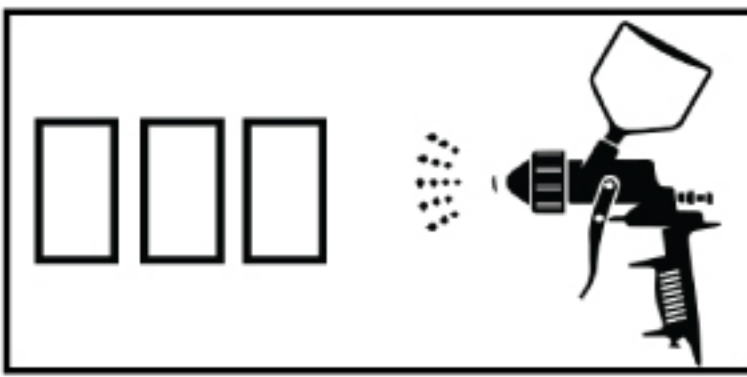

6. Apply 1 final UNTINTED 2K clearcoat to all panels, simultaneously, as this will have an effect on the final shade and result.

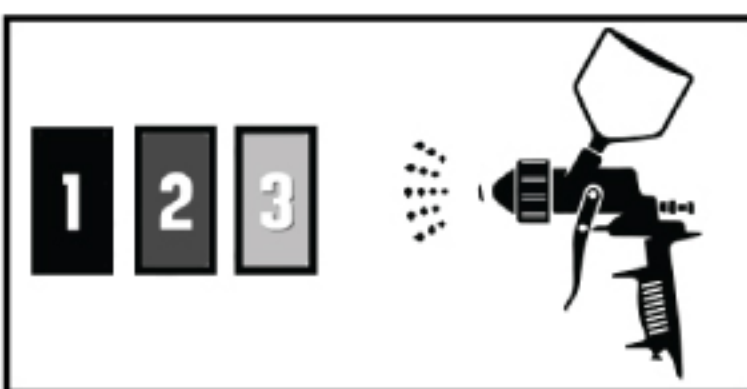

7. After drying, take all the 3 panels and assess to the target you are painting. This will make you decide how many coats are needed to achieve the best shade match.


CC- CLEARCOAT ADDITIVE




Step by Step : Blending Application




1. After a good preparation to the repair area, flat the whole panel with P1000-P1500 dry or P1500-P2000 wet to ensure good adhesion and to avoid dark arches.

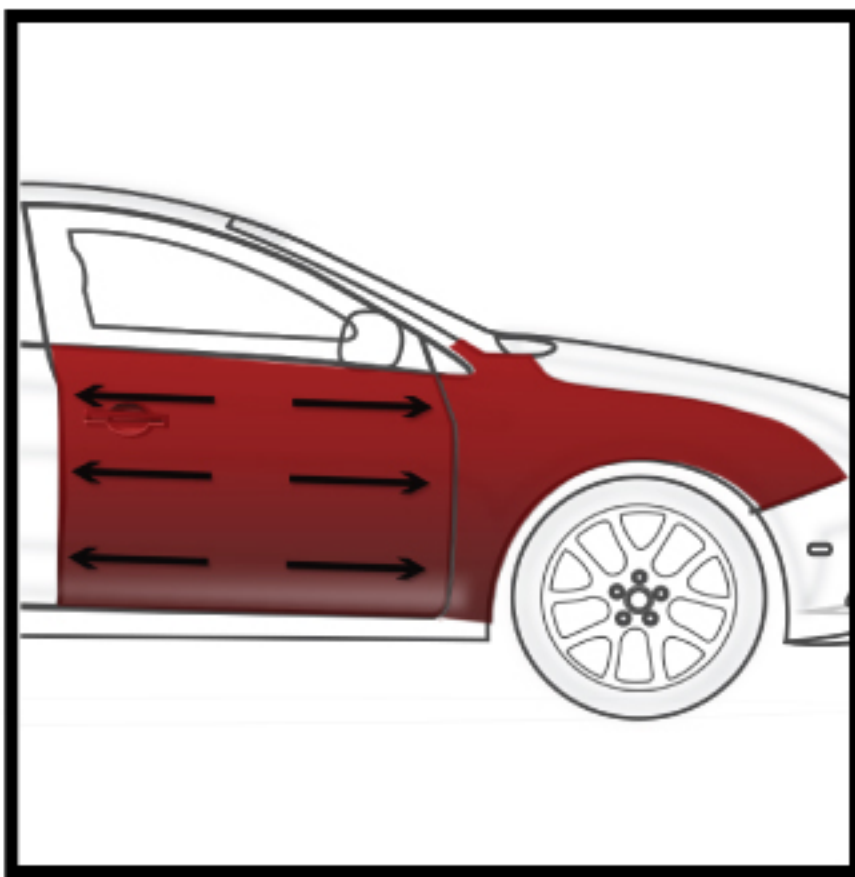

2. Apply the basecoat to the defined repair area as per technical data sheet.

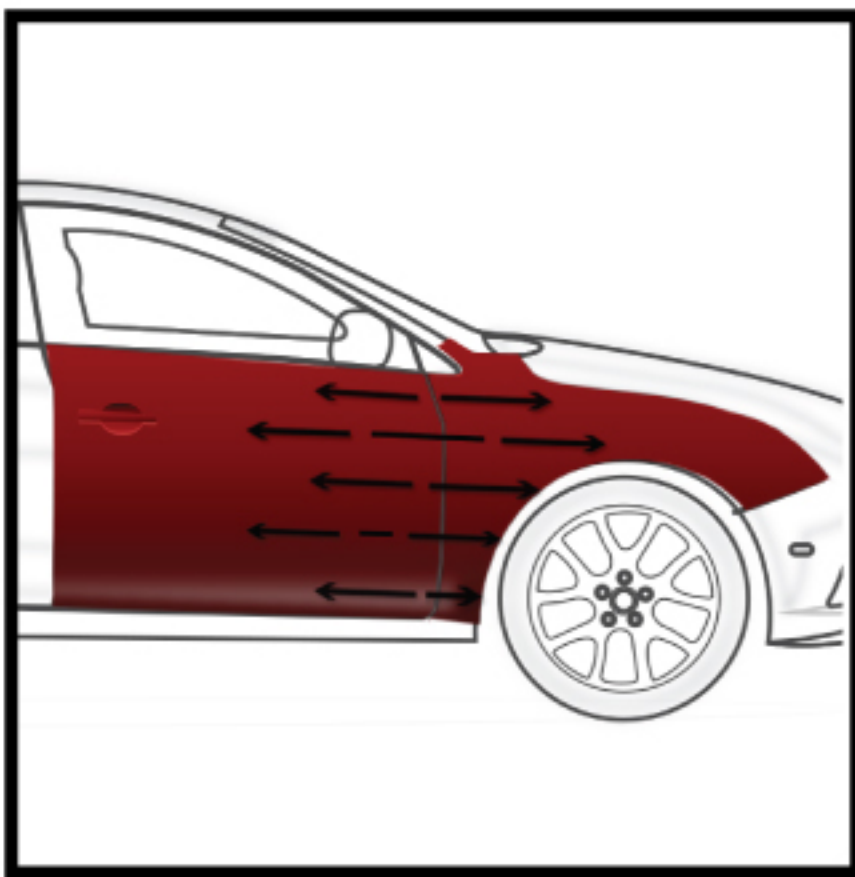

3. Blend the basecoat using the right blending agent from General product list with the right mixing ratio and blending techniques.

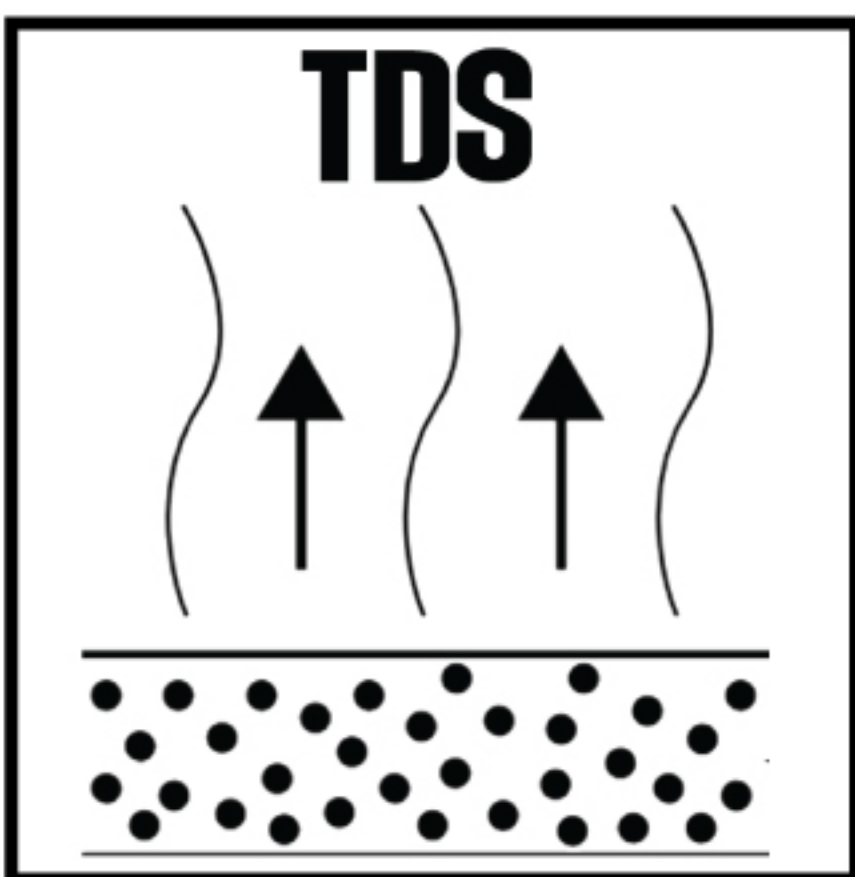


4. Tack off dust and "overspray" after adequate flash-off, refer to TDS.


CC- CLEARCOAT ADDITIVE




Step by Step : Blending Application (continued)

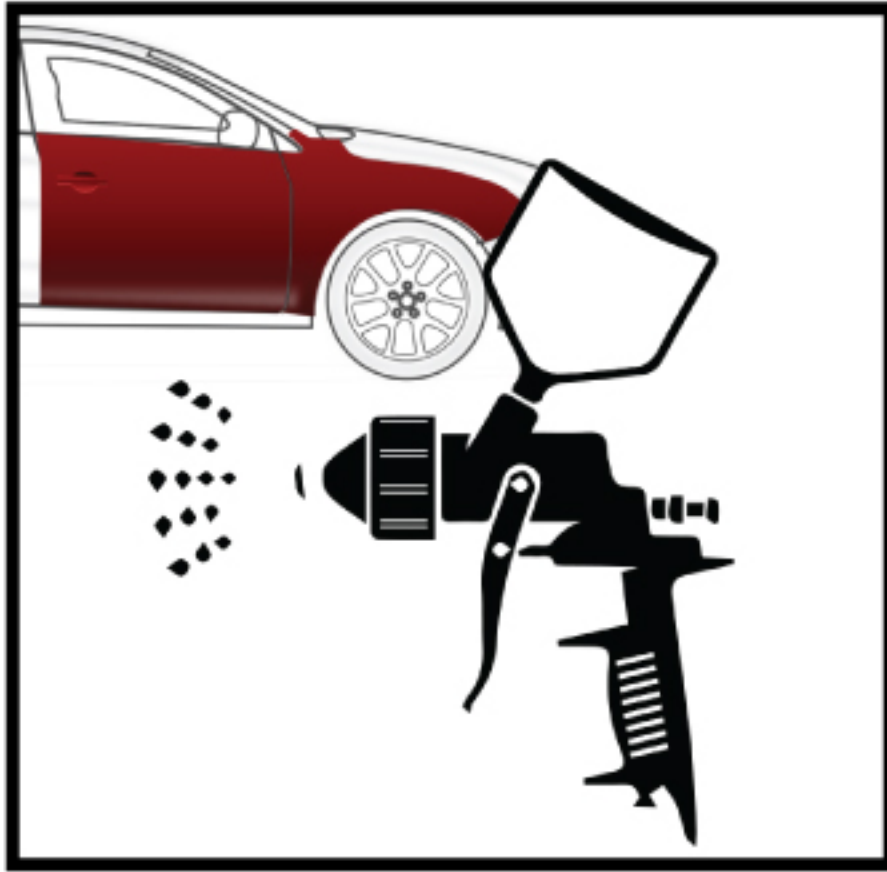


5. Apply 2K tinted clearcoat by overlapping the basecoat area in the desired number of coats as defined by the let-down panel procedure.

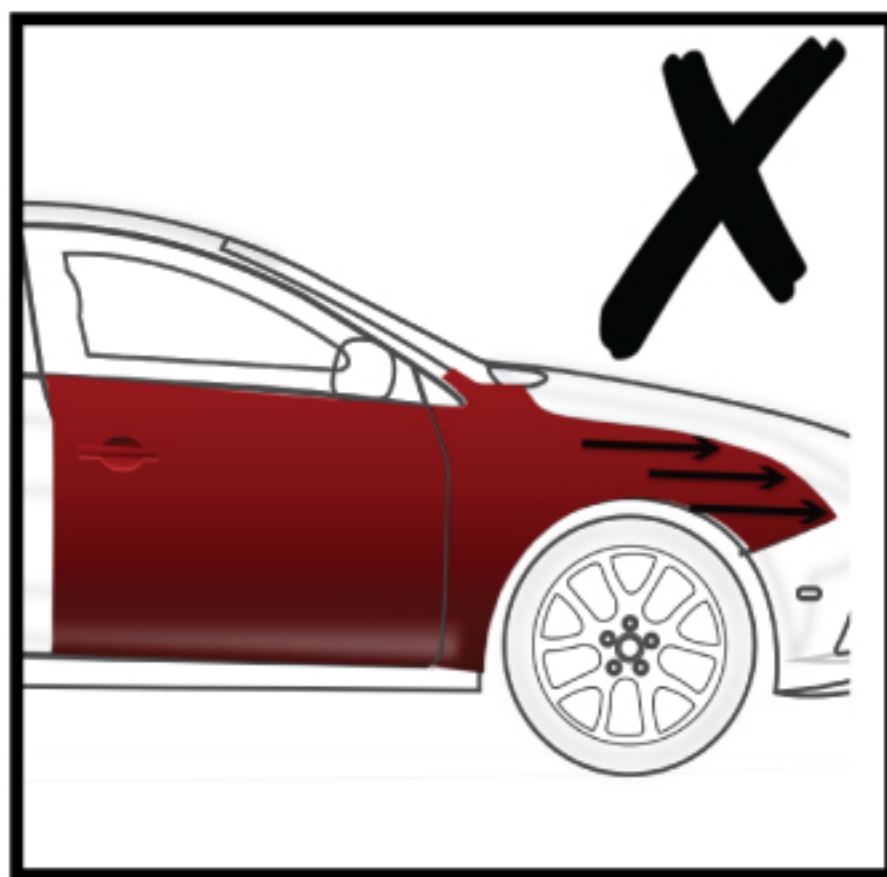

6. 2K tinted clearcoat should cover and overlap the basecoat application area and then blended in to out to avoid arching. It is essential not to coat the whole repaired panel with 2K tinted clear especially the part facing the adjacent panel mostly to avoid darker shade and therefore color difference to adjacent panel. After application and blending of 2K tinted clearcoat.

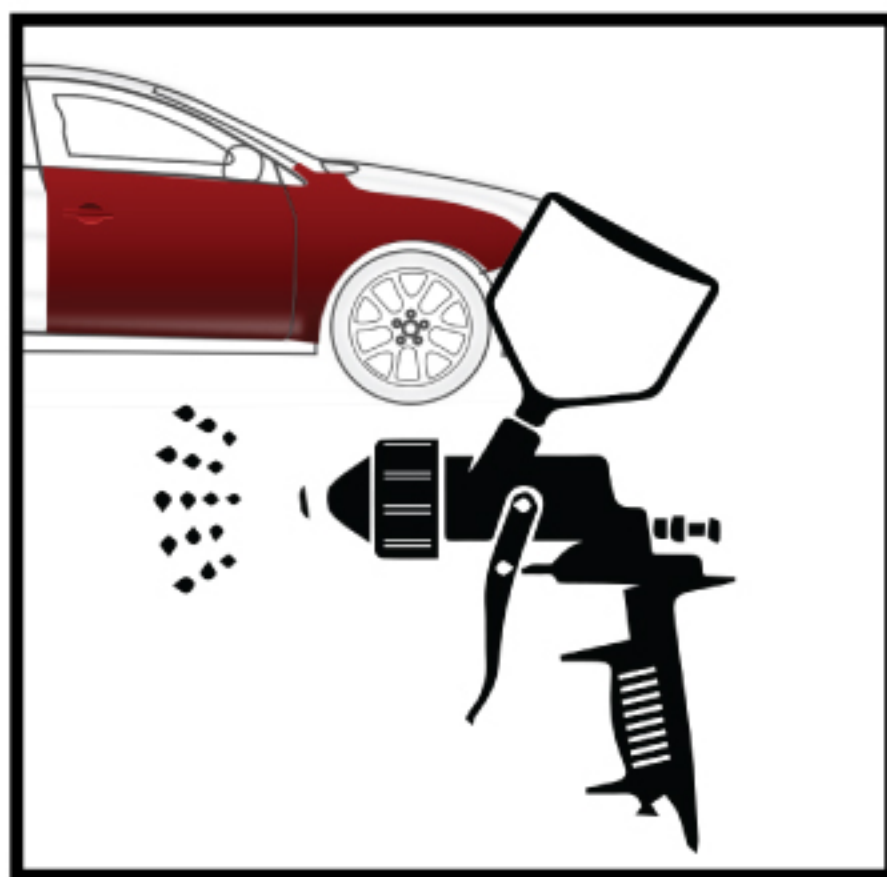

7. Apply one coat of the same clearcoat in use in its non-tinted version to the whole panel(s) to blend in the repaired area and to achieve the best results.

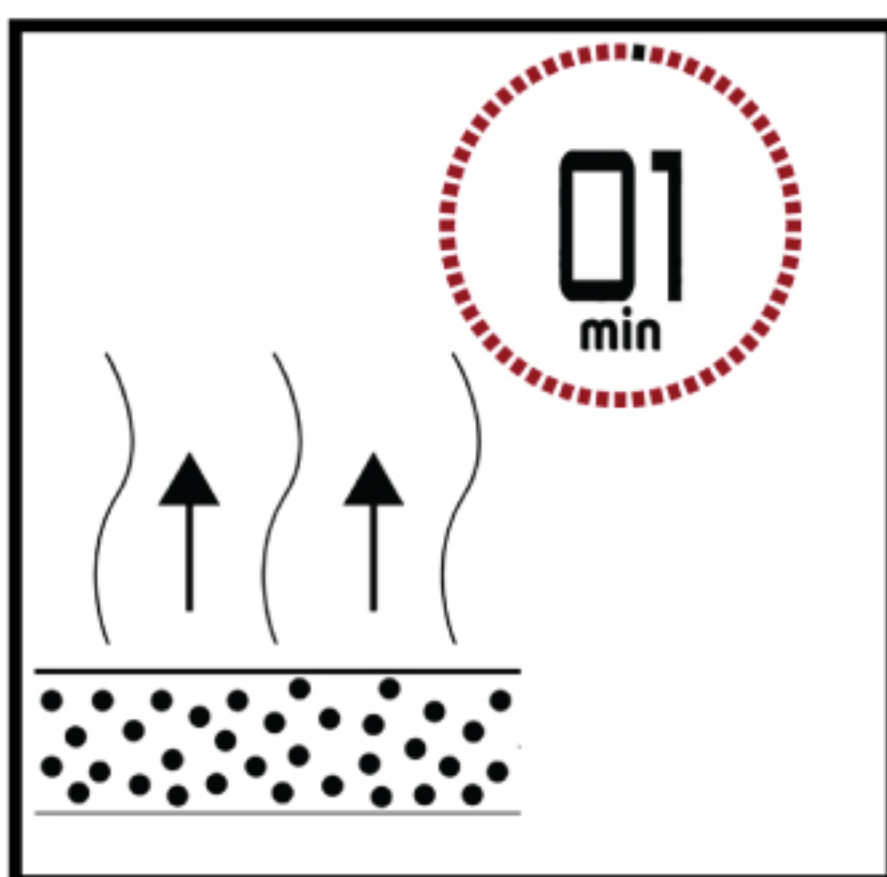

8. Allow no more than one minute flash-off in between the tinted and the un-tinted clears to melt down the resulted overspray on the opposite edge of the repair area.

CC- CLEARCOAT ADDITIVE



Other Notes:

We've introduced the Tinted Clear in the GenMix and the Online Color Retrieval too. The formula containing a Tinted Clear will be displayed as below and will contain a product called CLEAR.

MIXING SYSTEM Pro

Vehicle Make: MAKE Color Description: DESCRIPTION Tone: []
 Color Code: CODE Year: 02-20 M. VOC: [] Date: mm/dd/yyyy
 Panel no.: PANEL no. Kgs: 0.963 Liters: 1.000 C. VOC: [] Cost: 0

Available Paint Lines:
 BC (1st in 2)
 Tinted CC

| Formula Composition | | | | Actual Quantity | Quantity Difference |
|---------------------|------------------------|----------|----------------|-----------------|---------------------|
| Code | Description | Quantity | Qty Cumulative | | |
| CLEAR | READY FOR USE 2K CLEAR | 963.2 | 963.2 | 0.0 | 0.00 |
| CC5 | BRIGHT MAROON | 24.1 | 987.3 | 0.0 | 0.00 |
| | | | | 0.0 | 0.00 |

Alternative Description Details Color Box Info Comments

Copy to Custom Formula Multicoat

Search Policies Parameters Logout (test) QUICKSEARCH

Manufacturer Code: MAKE CODE Description Year: DESCRIPTION Tone Panel no.: STANDARD 12347

BC Ground coat in a two-stage formula with tinted clear Current Revision: Month day, year ✓

Quantity in Liters (Min. 0.00107): 1

| Ground coat in a two-stage formula | | | |
|------------------------------------|---------------------|----------|------------|
| Code | Description | Quantity | Qty Cumul. |
| 746 | BASECOAT BRIGHT RED | 830.4 | 830.4 |
| P011 | SILVER GLITTER | 135.0 | 965.4 |

| Tinted Clear in a two-stage formula | | | |
|-------------------------------------|------------------------|----------|------------|
| Code | Description | Quantity | Qty Cumul. |
| CLEAR | READY FOR USE 2K CLEAR | 963.2 | 963.2 |
| CC5 | BRIGHT MAROON | 24.1 | 987.3 |

CC- CLEARCOAT ADDITIVE

